UNCLASSIFIED

AD 4 2 5 4 5 2

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U.S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

HEADQUARTERS DUGWAY PROVING GROUND Dugway, Utah

STEDP-EF

DEC 17 1963

SUBJECT: Report of Surveillance Test (Environmental) of Grenade, Hand, Riot, DM, E21R1; U. S. Army Test and Evaluation Command Project No. 5-3-0510-01, DPGR 377

) To:

Chan's

 \geq

Distribution List

1. This letter transmits the final report on surveillance test of Grenade, Hand, Riot, DM, E21R1.

- 2. Test Results. At the Desert, Temperate, and Tropic Sites the metal grenade containers were susceptible to corrosion. The body seams of the grenade began to separate after 43 months of storage at the Arctic Site. At all the sites, the grenade detonated satisfactorily.
 - 3. <u>Conclusion</u>. The Grenade, Hand, Riot, DM, E21R1 was satisfactory at all test sites.
 - 4. Recommendations. None.

FOR THE COMMANDER:


1 Incl as (Report of Test)

Director, Technical Plans

and Evaluation

CATALOSED BY

US ARMY

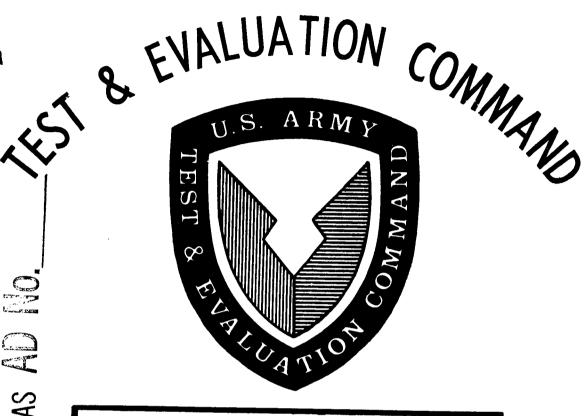

SURVEILLANCE TEST (ENVIRONMENTAL) OF GRENADE, HAND, RIOT, DM, E21R1 DPGR 377 USATECOM PROJECT NO. 5-3-0510-01 DECEMBER 1963

DUGWAY PROVING GROUND DUGWAY, UTAH



JIA B

SURVEILLANCE TEST (ENVIRONMENTAL)
OF GRENADE, HAND, RIOT, DM, E21R1
DPGR 377
USATECOM PROJECT NO. 5-3-0510-01
DECEMBER 1963

CONTENTS

		TI	TLE																							F	AGE
Part	I-	Gene	ral.		•	•	•	•	•	•	•	•	•	0	•	•	•	•	•	•	•	o	۰	•	•	•	5
	A.	Refe	rence	s.	•	•	•		•	•	•	•	•	•	•	•	•	•	•	٠	٥		٥	٥	۰	۰	5
	В.	Auth	ority		•	•	•	•	•	•	•	٥	o	•	•	•	•	•	•	۰	•	۰	۰	•	•	o	5
	C.	Desc	ripti	on	of	Mε	ιte	ri	.el	L.	•	•	•	•	•	•	•		٥			٠	•	•	۰	٥	5
	D.	Back	groun	d.	٠	•	•	•	•	•	•	•	۰	•	•	•	•	•	•	•	•	•	•	٠	•	٠	7
	E.	Test	Obje	cti	ves	з.	•	•	•	•	•	•	•	٠	•	•	•	•	•	•	•	•	۰	۰	•	•	7
	F.	Find	ings		•	•	•	•	•	•	•	۰	۰	•	•	•	•	•	•	•	o	•	•	٠	۰	•	7
	G.	Conc	lusio	ns.	•	•	•	•	•	•	٠	•	•	•	•	•	•	•	٥	۰	•	•	۰	۰	•	•	9
	н.	Reco	mmend	ati	ons	3.	•	•	•	•	•	•	۰	•	۰	٠	•	٠	۰	•	٠	•	•	•	•	•	9
Part			t Dat																								11
	A.		Site																								
	В.	Mete	orolo	gic	al	Cc	nd	lit	cio	ns	3.	•	٠	0	۰	٠	•	۰	•	•	•	•	o	•	o	•	11
	C.	Meth	ods.	• •	•	•	٠	•	•	•	•	۰	۰	۰	۰	۰	•	۰	•	۰	0	۰	•	•	•	•	11
	D.	Resu	lts.		٠	•	•	•	•	•	•	۰	•	•	۰	•	•	•	•	•	•	۰	۰	۰	٠	٠	12
	E.	Disc	ussio	n.	o	•	•	•	•	۰	•	o	•	۰	•	•	•	•	•	•	•	•	•	•	•	•	16
Part	III	- An	nexes	• •	•	•	•	•	•	•	•	•	۰	•	•	•	•	•	٠	0	•	٥	•	o	•	•	17
	Anne	ex A	- Ref	ere	nce	es	•	•	•	•	•	۰	۰	•	•	•	•	•	•	•	۰	•	•	•	•	•	18
	Anne	еж В	- Tes	t D	ate	ì.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	٥	•	•	19
	Ann	ex C	- Pho	tog	rap	phs	3.	•	•	٠	•	•	•	•	•	٠	•	•	•	•	•	•	•	•	•	•	28
Part	IV -	- Dis	tribut	tion	a L	is	t					•		•	_		•		•		_	_				_	20

HEADQUARTERS DUGWAY PROVING GROUND Dugway, Utah

Report of USATECOM Project No. 5-3-0510-01

Surveillance Test (Environmental) of

Grenade, Hand, Riot, DM, E21R1


(DPGR 377)

2 March 1959 to 28 May 1963

Part I - General

- A. References. See Annex A.
- B. Authority:
- 1. The authority for this test is USATECOM Project No. 5-3-0510-01, contained in Supplement No. 3, Materiel Test Program, U. S. Army Test and Evaluation Command, Aberdeen Proving Ground, Maryland, 30 April 1963, CONFIDENTIAL.
- 2. The purpose of the test was to determine the effects of environment upon the storage and operation of the grenade in climates represented by Arctic, Desert, Temperate, and Tropic Test Sites.
- C. <u>Description of Materiel</u>. The E21R1 grenade (Fig. 1) is a bursting type munition of approximately the same size and weight of a baseball. It is slightly less than three inches in diameter, and is composed of two molded plastic hemispheres cemented together. The agent filling is approximately 90 grams of micropulverized diphenylaminechloroarsine (DM Adamsite).

A burster well is formed by the upper and lower slider housings which are molded as parts of the upper and lower body halves. The inside of the closure plug, which is screwed into the bottom of the burster well, is molded to form a firing pin. A C12 detonator with a delay of approximately two seconds is contained in the slider which travels from the top to the bottom of the burster well to impact on the firing pin when the safety pin is withdrawn and the grenade is thrown.

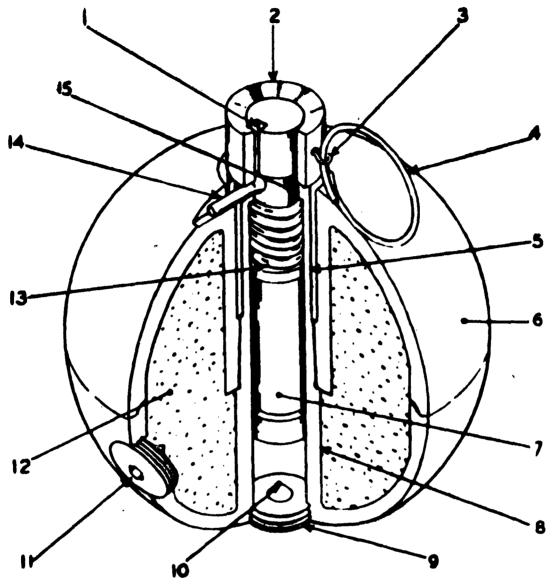

Legend:

- 1. Channel
- 2. Arming sleeve
- 3. Safety pin
- 4. Safety pin ring
 5. Slider housing, upper body
- Grenade body
- Slider

- 8. Slider housing, lower body
- 9. Closure plug
- 10. Firing pin
- 11. Filling plug12. Filling
- 13. Firing Spring
- 14. Retainer pin
- 15. Spring retaining shoulder

Figure 1. Sectional View of Grenade, Hand, Riot, DM, E21R1

D. Background:

- 1. <u>Development</u>. The E21 Grenade (DM filled) was developed in response to a requirement stated by the U. S. Army Military Police Board, Fort Gordon, Georgia, for a more effective riot control grenade. The agent, CN, is frequently ineffective against personnel who have built up a resistance to the agent. The action of DM is more delayed, from 5 to 30 minutes, but it produces a more definite incapacitating action and has a more lasting effect. This bursting type grenade is believed to be more effective than a burning type in that personnel against whom it is used are not able to throw or kick it away. The grenade, as originally developed, was designated the E21 and had an ignition system nearly identical to the M25A1 CN Riot Grenade. The ignition system was later modified and the grenade was redesignated the E21R1.
- 2. <u>Previous Testing</u>. The E21 Grenade was subjected to chamber surveillance, rough handling, and functional suitability tests. During the detonation tests, the grenades subjected to tropic storage conditions, failed to function due to moisture which had collected in the black powder train in the slider assembly. This prevented the primer from igniting the charge. Two of the 50 grenades subjected to the rough handling test failed to detonate.
- 3. Modifications. Pilot lots of the E21 Grenade were manufactured, but preliminary tests indicated that the design was deficient. The arming sleeve was redesigned, the slider modified, and a retainer pin substituted for the arming spring and the safety balls. These modifications were to simplify production and to improve the functional suitability. The redesigned grenade was designated the E21R1.
 - E. Test Objectives. See paragraph B 2.
- F. <u>Findings</u>. The Grenade, Hand, Riot, DM, E21R1 was found to be satisfactory. The military characteristics for the Grenade, Hand, Riot, DM, E21R1 and the extent to which the grenade satisfies the military characteristics are as follows:
- 1. "Be comparable to Grenade, Hand, Riot, CN, M25A1 as to distance, ease, and accuracy with which it can be projected by hand."
- Satisfactory. The characteristics of the two grenades should be comparable since the weight, size, and shape of the two grenades are nearly the same.
- 2. "Burst approximately two seconds after initiation of the fuze, which occurs when properly thrown."

Satisfactory. The average detonation delay time for the cycles ranged from 1.8 seconds at the Desert Site to 2.5 seconds at the Arctic and Tropic Sites.

3. "Burst without causing permanent injury to personnel immediately adjacent thereto."

Not evaluated.

4. "Function reliably under all conditions of weather and temperature ranging from -65 to 125° F."

Partially evaluated. The grenades were not detonated under such extreme conditions, but were detonated at temperatures ranging from 8°F at the Arctic Site to 105°F at the Desert Site.

5. "Contain an agent which, when disseminated as an airborne cloud, will quickly incapacitate for a minimum period of one hour but will not permanently injure those who breathe it."

Not evaluated. This was not evaluated by this test program but DM was chosen because it fulfills the requirement of this military characteristic.

6. "Be suitable for storage and transportation at temperatures from -80° to + 160° F."

<u>Partially evaluated</u>. There were no data on temperature conditions while in transport. The grenades were found to be satisfactory under temperature conditions of -62° to 114° F while in storage.

7. "Withstand deterioration of agent filler under all conditions of exposure for periods of at least two years, and perferably five years."

Not evaluated. During the testing, no grenades were opened to examine the agent, but the agent cloud characteristics of color regularity and of size were not reported to have changed during the 49 months of testing.

8. "Be sufficiently rugged to withstand safely, rough hauling, storage or transport, including air supply operations, without affecting the functioning characteristics."

Partially evaluated. Although the grenades were not rough hauled before testing during each cycle, the grenades did function satisfactorily after transport to the test sites.

- G. <u>Conclusions</u>. The Grenade, Hand, Riot, DM, E21R1, performed satisfactorily at Arctic, Desert, Temperate, and Tropic Test Sites since 99 per cent functioned satisfactorily after storage ranging from 0 to 49 months.
 - H. Recommendations. None.

FOR THE COMMANDER:

EORGE J. CABREY

Asst Scientific Director

For: M. A. ROTHENBERG Scientific Director

Part II - Test Data

A. <u>Test Sites and Dates of Test</u>. The testing was conducted at the environmental test sites at Fort Greely, Alaska (Arctic); Yuma Proving Ground, Arizona (Desert); Edgewood Arsenal, Maryland (Temperate); and Fort Clayton, Canal Zone (Tropic).

The tests were conducted at the Arctic Site from 12 August 1959, through 8 May 1963; at the Desert Site from 27 July 1959, through 1 May 1963; at the Temperate Site from 27 August 1959, through 28 May 1963; and at the Tropic Site from 30 July 1959, through 23 April 1963. Detailed listings of dates of tests are given in Table 5, Annex B.

B. <u>Meteorological Conditions</u>. Meteorological data recorded during the storage of the grenade included temperature, relative humidity, dew point, windspeed and precipitation. The grenades were stored at the Arctic Site at temperatures as low as -62° E, and at the Desert Site, as high as 114° F. The relative humidity ranged from 2 per cent at 113° E at the Desert Site to 100 per cent at 86° F at the Tropic Site. Detailed meteorological data for storage periods will be furnished upon request to the Commanding Officer, Dugway Proving Ground, ATTN: STEDP-EF, Dugway, Utah.

C. Methods.

- 1. <u>Initial Inspection and Storage</u>. The 250 grenades tested at each site were transported in wooden boxes. Upon receipt of the grenade, the wooden boxes were inspected for deterioration, corrosion of metal bands and nails, and legibility of markings on the boxes. The grenades tested during Cycles 0 through 7, were stored in their wooden packaging boxes on pallets under tarpaulins at the Arctic Site, and on pallets under ventilated cover at the Desert, Temperate, and Tropic Sites. Fifty grenade containers (hermetically-sealed metal containers) were removed from the wooden boxes. These containers were inspected for dents, corrosion, and legibility of markings. These containers were then stored on pallets under tarpaulins at the Arctic Site, and on pallets under ventilated cover at the Desert, Temperate, and Tropic Sites, until they were tested in Cycles 8 and 9.
- 2. Cyclic Test Procedure. During each cyclic test, the wooden boxes, metal grenade containers, and grenades were inspected. During each cycle, 25 grenades were detonated. Test personnel tried to maintain approximately a 3 to 1 ratio of air-to-ground bursts respectively. When the grenade burst in the air, the approximate height of the burst was recorded. The detonation delay time (time between the arming sleeve release and the detonation of the grenade) and the time the agent cloud remained visible were measured and recorded. Photographs were made of the agent clouds at the time

of detonation. Photographs of typical air and ground bursts are shown in Figures 3 and 4, Annex C. The number, and, if possible, the cause of duds were recorded.

D. Results.

1. Arctic.

a. Visual Inspection. After 43 months of storage, the seams of the body hemispheres on some grenades were beginning to separate. However, these cracks did not extend into the body of the grenade, nor was any agent leakage evident.

b. Functional Tests. The number of air bursts, and the averages of height of air bursts, detonation delay time and time the agent cloud remained visible for the functioning tests are given in Table 1. Averages for the detonation delay time, and time the cloud remained visible, are based on air and ground bursts together. Complete data for these tests are given in Table 6, Annex B.

Table 1. Arctic Site - Data Summary

CYCLE	AIR	BURSTS	DETONATION DELAY	CLOUD VISIBILITY
	Number	Average Height	Average	Average
		(ft)	(sec)	(sec)
0	12.	7	2.5	5
1	18	6	2.2	9
2	14	7	2.0	21
3	12	12	2.3	12
4	15	30	2.4	30
5	16	5	2.3	20
6	15	4	2.0	42
7	15	5	2.3	15
8	16	6	2.4	18
9	16	7	2.3	14

One grenade failed to detonate during Cycles 0 and 9. The retainer pin failed to pivot into the channel of the slider (Fig 2). It should be noted that the retainer pin is binding in the slider housing, preventing the slider from striking the pin.

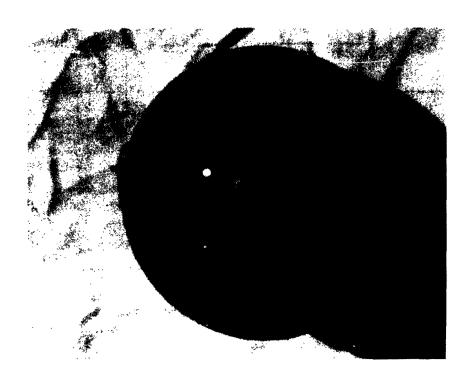


Figure 2. Retainer Pin Binding in Slider Housing

2. Desert.

a. Visual Inspection. Inspection revealed rust on the metal bands and nails on the wooden boxes, and rust on the metal grenade containers. A broken retainer pin and an improperly mounted arming pin were found during Cycles 3 and 8, respectively. These grenades were destroyed.

b. Functional Tests. The number of air bursts, and the averages of height of air bursts, detonation delay time, and the time the agent cloud remained visible are given in Table 2. Averages for the detonation delay time, and time the cloud remained visible, are based on both air and ground bursts. Complete data for these tests are given in Table 7, Annex B.

Table 2. Desert Site - Data Summary

CYCLE	Number Aver		DETONATION _DELAY	CLOUD VISIBILITY
	Number	Average Height	Average	Average
		(ft)	(sec)	(sec)
0	10	$\mathtt{ND}^{\mathbf{a}}$	2.4	23
1	10	ND	1.9	18
2	10	ND	1.9	18
3	10	ND	1.9	16
4	10	ND	1.8	25
4 5 6	11	ND	1.8	20
6	11	ND	2.0	15
7	17	ND	2.0	33
8	15	ND	2.2	36
9	14	5	2.1	11

a_{No data}

Two grenades malfunctioned during the testing. During Cycle 5, one grenade failed to detonate because the retainer pin failed to pivot into the channel of the slider (Fig 2). During Cycle 7, one grenade was a dud as a result of a slider assembly failure.

3. Temperate.

a. Visual Inspection. Inspection showed no deterioration of the wooden packaging boxes, and slight rust deposits on the tear strips and bottom rims on metal grenade containers.

b. Functional Tests. The number of air bursts, and the averages of height of air bursts, detonation delay time, and time the cloud remained visible are given in Table 3. Averages for the detonation delay time and time the cloud remained visible are based on both air and ground bursts. Complete data for these tests are given in Table 8, Annex B.

One grenade in Cycles 1 and 5 malfunctioned. Both grenades had a slightly bent arming sleeve which prevented them from being ejected.

Table 3. Temperate Site - Data Summary

CYCLE	AIR B	JR ST S	DETONATION DELAY	CLOUD VISIBILITY
	Number	Average Height	Average	Average
		(ft)	(sec)	(sec)
0123456789	16 17 16 16 15 15 15 15 12	8 5 5 5 6 8 2 7 6 6	2.2 2.2 2.3 2.2 2.2 2.1 2.2 2.2	25 13 18 9 13 15 11 14 24 16

4. Tropic.

a. Visual Inspection. Slight rust was found on the metal bands and nails of the wooden boxes and on the metal grenade containers. During Cycle 1, four grenades were found to have loose safety pins, and one grenade was found to have a closure plug protruding outward approximately an eighth of an inch. During Cycle 8, one grenade was found to have a 1-inch crack extending outward from the filling plug, and six grenades were found to have a black tar-like substance around the filling plug. All markings on the wooden boxes and metal containers were satisfactory.

b. Functional Tests. The number of air bursts, and the averages of height of air bursts, detonation delay time, and time the agent cloud remained visible are given in Table 4. Averages for the detonation delay time and time the cloud remained visible are based on both air and ground bursts. Complete data for these tests are given in Table 9, Annex B.

During Cycle 4, one grenade malfunctioned because the retainer pin failed to pivot into the channel of the slider (Fig 2). Two grenades malfunctioned during Cycle 9. The causes could not be determined although the duds appeared to be caused by faulty detonators.

Table 4. Tropic Site - Data Summary

CYCLE	AIR B	URSTS	DETONATION DELAY	CLOUD VISIBILITY
	Number	Average Height (ft)	Average (sec)	Average (sec)
0123456789	17 17 19 17 17 18 18 18 14	10 9 5 5 5 8 8 6 7	2.3 2.2 2.3 2.4 2.4 2.4 2.5 2.3 2.3	30 23 30 36 28 28 21 36 29 20

E. <u>Discussion</u>.

- 1. Cloud Visibility. The difference in the time the agent cloud remained visible between cycles and test sites can be attributed to differences in meteorological conditions, terrain features, and opinion of observers.
- 2. <u>Deterioration of Body Seams at Arctic Test Site</u>. As noted in Part II, paragraph D 1 a, splitting of body seams began to appear after 43 months of storage. This did not cause any agent leakage during the 49 month period of testing, but might render the grenade unusable after more prolonged periods of storage.

Part III - Annexes

Annex A. References

Annex B. Test Data

Table 5. Dates of Tests

Table 6. Detonation Data - Arctic

Table 7. Detonation Data - Desert

Table 8. Detonation Data - Temperate

Table 9. Detonation Data - Tropic

Annex C. Photographs

Figure 3. Typical Air Burst

Figure 4. Typical Ground Burst

References:

- 1. Dugway Proving Ground Test Plan 455, Grenade, Hand, Riot, DM, E21R1: Item 69A; 6 July 1959 UNCLASSIFIED.
- 2. Letter, CMLRD-EDS-S, Headquarters, U. S. Army Chemical Corps Engineering Command, Army Chemical Center, Maryland, 14 October 1958, subject: Technical Criteria for Envrionmental Testing of Grenade, Hand, Riot, DM, E21. UNCLASSIFIED.
- 3. TM 3-215, <u>Military Chemistry and Chemical Agents</u>, August 1956 with Change No. 1, April 1959. UNCLASSIFIED.

Table 5. Dates of Tests

CYCLE	ARCTIC	DESERT	TEMPERATE	TROPIC
0	12 Aug 59	27 Jul 59	27 Aug 59	30 Jul 59
1	19 Jan 60 20 Jan 60 21 Jan 60	16 Dec 59	19 Ja n 60	6 Jan 60
2	9 Jun 60	9 May 60	6 Jun 60	2 Jun 60
3	8 Nov 60	12 Oct 60	8 Nov 60	1 Nov 60
4	10 Apr 61 11 Apr 61	14 Mar 61	11 Apr 61	28 Mar 61 29 Mar 61
5	12 Se p 61	18 Aug 61	28 S ep 61	29 Aug 61
6	13 Feb 62	16 Jan 62	15 Feb 62	30 Jan 62
7	17 Jul 62	12 Jun 62	19 Jul 62	5 Jun 62
8	15 Nov 62	17 Nov 62	8 Jan 63	27 Nov 62
9	8 May 63	1 May 63	28 May 63	23 Apr 63

(continued)

Table 6-A. Detonation Data - Arctic

CLOUD VISI- BILLIY (sec)	27.4 26.9 26.7 35.2 34.7	39.4 39.4 36.0	26.12 20.29 30.2 36.2 36.2	22.8 24.6 21.1 21.1 21.5	88 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	29.8
HEIGHT OF BURST (ft)	ខ្លួននេះ	ይዩሤሄሤ	23383	00000	00000	æ
FUZE DELAY (sec)	ชุงชุงชุ พักษ์เล่น่า	0 0 0 0 0 0 1 4 0 0	ທຸທຸທຸທຸ ພັບໍ່ເບ້ເຄີ	ด ด ด ด ด กัจ ฉันน์กั		2.4
CLOUD VISI- BILLTY (sec)	12.0 13.5 13.5 10.6	11111 2008 2001 1001	10.00 11.20 10.00	15.6 18.0 11.2 11.1	6 1111 1.5.2.2.1 1.5.5.8.	11.8
HEIGHT OF BURST (ft)	0 0 15 0 10	๑๛ฬ๛๐	8 0 15 5	'ଚିତ୍ର ସ	00000	व
FUZE DELAY (sec)	999999 44649	999999 44458	99999 67644	99999 6999	0 0 0 0 0 0 4 2 2 2 2 2	2.3
CLOUD VISI- BILITY (sec)	5.55 4.75 6.55 6.55	28.0 15.1 29.4 11.5 22.5	24.6 28.4 25.8 16.6	21.6 28.8 28.4 16.2 24.0	28.58 29.8 20.3 20.3 20.3	20.8
HEIGHT OF BURST (ft)	77,600	၀ရှ~ရှဝ	90100	०७७७०	00000	7.1
FUZE DELAY (sec)	2.1 1.9 1.9 1.9		<u>"</u> " " " " " " " " " " " " " " " " " " "	44499	99999 10101	2.0
CLOUD VISI- BILITY (Sec)	7.8 10.0 12.0 6.2 9.5	8.3 7.5 9.5 9.5	2.69 7.99 7.97	8.8 8.2 8.7 7.7	8.7.69 9.69 9.39 7.39	8.5
HEIGHT OF BURST (ft)	18878F	000-1-	80-09	0000m	ריס דירוס	6.3
FUZE DELAY (sec)	<u> </u>	ี่ ผู้เก๋งน์ผู้	ี ช ุด ผูช ผู จ ุด คุร	מממממ תُغِنْ شَنْفَ	<u> </u>	2.2
CLOUD VISI- BILLTY (sec)	5.9 6.0 6.1 1.4	4.4 5.1 5.1 5.6	4.0.0.04 4.1.6.1.6.	~~~~ ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~ ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	5.3 .
HEIGHT OF BURST (ft)	00000	7 Dud 0	01 o 4 o ₹J	40006	ν 0400	ک و: ک
FUZE DELAY (sec)	0.0.0.0.0 804.044	9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	ળળળળળ વિવાસ	000000 40044		Average: 2.5
	HEIGHT CLOUD FUZE HEIGHT DELAY OF USI- OF USI- OF USI- OF USI- OF USI- OF OF USI- OF OF OF OF OF OF OF O	HEIGHT CLOUD FUZE HEIGHT OF VISI- DELAY OF DELAY OF DELAY OF OF DELAY OF DELAY OF OF OF OF OF OF OF O	HEIGHT CLOUD FUZE HEIGHT HEIGH	Harden CLOUD FUZE REIGEN CLOUD FUZE REIGEN CLOUD CF CF Surest Hiller CLOUD FUZE REIGEN CLOUD CF CF Surest Hiller CF CF CF Surest Hiller CF CF Surest Hiller CF CF CF Surest CF CF CF CF CF CF Surest CF CF CF CF CF Surest CF CF CF CF CF CF CF C	Figure Cloud Fuzz Erich Cloud Fuzz Erich Cloud Fuzz Erich Cloud Crit Crit Cloud Crit Crit Cloud Crit Crit Crit Cloud Crit Crit	The column Table Table

(concluded)

Table 6-B. Detonation Data - Arctic

	· · · · · · · · · · · · · · · · · · ·						
	CLOUD VISI- BILITY (sec)	ដូននេដ	សួននេះ	3 2 5 5 5 5	ងឧសងដ	8 6 63	14
•	HEIGHT OF BURST (ft)	00000	20 0 5 1	t o 2	041-vm	8 ~ ~ 5	7
	FUZE DELAY (sec)	0.0.0.0.0 0.0.0.0.0	999999 509999	0.0 0 0.0 0.0 0.0 1.0 0.0 1.0	4 4 6 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	, a a a	2.3
	CLOUD VISI- BILLTY (sec)	2444 1244 13	25 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	8 28 34	2888	8 4 2 4 2	18
80	HEIGHT OF BURST (ft)	00000	φωφωφ	≯ ≻21001	φωαπω	00000	9
	FUZE DELAY (sec)	900000 40000	99999999999999999999999999999999999999	ળળળળળ બંચંચંલંબં		ังงงง กับบั÷	2.4
	CLOUD VISI- BILLTY (sec)	ងដងដង	មួយជូង	ងងដ្ឋង	5345 4	15 12 12 15 15 15 15 15 15 15 15 15 15 15 15 15	15
7	HEIGHT OF BURST (ft)	74 4 7 0 0 15 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	000m0	02 02 04	90NNW	mm000	5
	FUZE DELAY (sec)	ળળળળળ ળંળવંવવં	00001 000010	प्लाय ल छ।एंज छ छ		0 0 4 0 0 0 0 6 0 6	2.3
	CLOUD VISI- BILITY (sec)	45 SS 45 45 45 45 45 45 45 45 45 45 45 45 45	41 37 45 41	25522	233338 8	చ్చిని చ	Z¥
9	HEIGHT OF BURST (ft)	nmaan	90 00 7	ณ ๛ ๛ ๐ ณ	N N M O O	00000	17
	FUZE DELAY (sec)	ი ი ი ი ი 4 ი ი ა ა ი	000000	23.1 4.1 1.8 1.8	100.4 10.9 10.5	0.0 1.8 1.4	5.0
	CLOUD VISI- BILITY (sec)	12692 14693 16693 16693 16693 16693 16693 16693 16693 16693 16693 16693 16693	14 28 23 23	23 8 8 8 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	35 55 56 56 57	88 B B B	20.3
5	HEIGHT OF BURST (ft)	00000	4 6 0 0 4	00400	0 rv w 0 4	<u> ಇ ಬಂಇ ಗ</u>	8 .4
CYCLE	FUZE DELAY (sec)	4 0 0 0 0 E		4. E. G.	0 0 0 0 0 0 0 0 4	44.004 44.004	Average: 2.3

Table 7-A. Detonation Data - Desert

		*		· · · · · · · · · · · · · · · · · · ·				_
	CLOUD VISI- BILITY (sec)	16.0 28.0 30.0 30.0	31.50.0.0 31.00.0.0	25.0 25.0 25.0 25.0 35.0	22.0 30.0 86.0 24.0	21.0 27.0 19.0 22.0 24.0	4.59	(continued)
	HEIGHT OF BURSI [®] (ft)		:::::	11111	:::::	:::::		(con
	FUZE DELAY (sec)	8.6.6.9	44444 98688	44444 88689	9.0.0.0.0	000000	1.8	
	CLOUD VISI- BILLTY (sec)	15.8 9.0 18.0 17.0 22.0	15.0 17.0 17.0 20.0	13.0 15.0 15.0 15.0	15.0 13.0 15.0 16.0	16.0 11.0 15.0 13.0 Dud	15.6	
٣	HEIGHT OF BURST® (ft)	1111	11111	1111		1::::		
	FUZE DELAY (sec)	4 0 0 0 1 8 8 0 0 1 8	2.0 1.6 1.8 1.8	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	94999 96999	0.0 0.0 0.0 0.0	1.9	
	CLOUD VISI- BILITY (sec)	25.55 25.59 25.59 25.69 25.69 25.69	25 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	15.0 28.0 17.0 15.2 18.0	19.2 17.8 26.0 19.6 20.8	18.6 20.4 15.2 21.6 18.4	18.0	
5	HEIGHT OF HURST ^A (ft)	11111	11111	11111	11111	:::::		
	FUZE DELAY (sec)	6.1.9.1.0.1.0.1.0.0.1.0.0.0.0.0.0.0.0.0.0	4.0.4.9.4.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.	9.44.6.4 8.6.6.4	9 4 9 9 1 9 0 0 8 1	6.0.4.4.4.6.6.6.6.6.6.6.6.6.6.6.6.6.6.6.	1.9	le).
,	CLOUD VISI- BILITY (sec)	11.9 18.9 15.5 18.5 24.5	18.5 20.9 19.5 2.5	18.5 16.5 15.3 16.4 13.2	15.5 20.1 13.9 16.6 19.3	18.4 16.6 17.3 19.1	17.8	t this tal
1	HEIGHT OF BURST & (ft)	11111		11111		11111		throughout
	FUZE DELAY (sec)	0 0 0 0 0 0 0 0 0 0	8.00 H H H H H H H H H H H H H H H H H H	8.5.0.00 0.00	4 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	20.00	1.9	plicable
	CLOUD VISI- BILITY (sec)	15.0 19.1 14.4 10.2 16.8	19.2 15.9 21.7 27.4 26.1	25.5 36.5 19.8 25.1	8 55 55 55 55 55 55 55 55 55 55 55 55 55	25.9 22.8 30.7 30.7 32.5	23.1	No Data (superscript applicable throughout this table).
0	HEIGHT OF HURST ^B (ft)	11111	1111	1111	11111	!!!!!	••	ta (super
CYCLE	FUZE DELAY (sec)	9 0 0 0 0 v	<u>a a a d w</u> rv rv rv d a	ู่ ผู้เก๋ย์ ผู้เก๋ย์	ળ ળ ન ળ ળ બ બ જ બ બ		Average: 2.4	No Det

Data (superscript applicable throughout this table)

(condinded)

CLOUD VISI-BILLEY (Sec.) 8.01 88-100 30248 222-3 22242 BURST (ft) 4.5 0.000 00000 M400-4 FUZE (sec) 4 00000 04464 20000 0.0000 5.1 CLOUD VISI-BILLITY (Sec.) 83888 F48F8 66669 F76664 33.1. 33.1. 33.4. 54.7. Ò Ř HEIGHT OF HURST (ft) Ø -1111 11111 1111111111 11111 FUZE (sec) ળળળળળ વિ. ખેતાં બંબ લિલલલ લંલનંદાં લંલનંદાં 40000 2.5 CLOUD VISI-BILLTY (Sec) 33.4 ଜ୍ଞ ଅନ୍ତର୍ଜ୍ଜ ଅନ୍ତର୍ଜ୍ଜ స్త్రిప్లిక్ల జిక్కిస్టర్ట్ 폭크였죠라 HEIGHT OF BURST® (ft) 31111 1111 1111 11111 FUZE (sec) 00000 40044 40000 2.0 4000 B 44004 CLOUD VISI-BILITY (Sec) 15.4 15.8 13.4 8,2<mark>8,8</mark>9,9 16,2,8 12.5.0 12.4.1 12.4.1 12.8.2 14.5 24 54 5 5 44,44,4 HEIGHT OF BURGEA (ft) φ 1.1111 1111 1111 1111 11111 PUZE (sec) 9,0,00,00 0.0.0.4.6. 0.000.00 4.0000 5.0 CLOUD VISI-BILITY (Sec) 19.5 芯 수 극 되고 💆 49878 43884 43864 84884 18674 34684 43864 HEIGHT OF HURST[®] (ft) 11111 11111 1111 Average: 1.8 CTCLE PUZE (Sec.) 44444 999999 446644 99999 9.11.0 9.19.6 9.19.6

Detonation Data - Desert

Table 7-B.

Table 8-A. Detonation Data - Temperate

	CLOUD VISI- BILLIY (sec)	13.00 13.00 13.00 13.00	13.1 10.4 13.5 14.2	14.5 11.9 10.8 12.0	13.1 15.0 11.3 11.3	11.6 13.7 17.2 18.7	9 12.8
.#	HEIGHT OF BURST (ft)	ഠഷം ഷയന	00000	N + 0 S &	04040	# O # O %	6.5
	FUZE DELAY (sec)	999999 49450	9.9.9.9.9.4. 4.6.7.1.6.	99999999999999999999999999999999999999		2.5.5.5.5.5.5.5.5.5.5.5.5.5.5.5.5.5.5.5	2.2
	CLOUD VISI- BILITY (sec)	4 64 64 0 64 1 1 7	6.6 8.0 11.1 9.5	15.2 14.5 12.5 9.5 11.2	122 16.2 11.1 9.7	6.1 7.8 10.5 8.8	8.9
3	HEIGHT OF BURST (ft)	οω≠ωο	N ዮ ዮ ዮ CO	₩000₩	44400	00040	5.2
	FUZE DELAY (sec)	9 w w 9 9 9 0 2 5 9 7			94999 9499	99999999999999999999999999999999999999	2.3
	CLOUD VISI- BILLTY (sec)	17.0 13.0 12.0 21.0	15.0 12.0 14.0 18.0	19.0 18.0 23.0 13.0	19.0 17.0 17.0 20.0	19:0 18:0 20:0 25:0	18.0
ત્ય	HEIGHT OF BURST (ft)	०मनमन	0000#	キキ ろろ の	, 86 kG	04000	8.4
	FUZE DELAY (sec)	००००० जिल्लाम्य		<u> </u>		9.9.9.9.9 6.4.4.9.6.	2.2
	CLOUD VISI- BILITY (sec)	15.2 15.6 15.8 18.2	10.8 18.0 9.2 6.3	12.6 18.3 14.8 13.1	8.8 8.0 6.0 6.6 6.6 7.6 8.6	14.8 19.2 13.9 13.9	12.7
1	HEIGHT OF BURST (ft)	00200	15 7 0 6 Dud	დ <i>⊢</i> ≉≉≉	00040	4 の314	5.2
	FUZE DELAY (sec)		0,0000 0,0000 0,0000 0,0000		44400 44400	99999999999999999999999999999999999999	2.2
	CLOUD VISI- BILLTY (sec)	\$ 55 # 56 # 56 # 56 # 56 # 56 # 56 # 56	38888	2228	388	888888	25 .
c	HEIGHT OF BURST (ft)	04080	००२४०	Στ. ο ο ο Ο ο ο ο	00,000	៳ៜឣ៰៷	7.7
CYCLE	FUZE DELAY (sec)	9,9,9,9,9,9,9,9,9,9,9,9,9,9,9,9,9,9,9,	40000		ળ ળ ળ ળ ળ ૦ ળ ળ ળ ળ ળ		Average: 2.2

								
	CLOUD VISI- BILLTY (sec)	19.5 19.1 12.2 16.6 19.0	13.8 17.0 17.4 16.0 18.4	11.9 18.1 18.9 12.2	13.00 19.00 14.00 14.00	16.7 16.0 17.5 13.7	16.0	(concluded)
6	HEIGHT OF HURST (ft)	⊢ ≠0m0	พดอฝิพ	014 w00	0000#	00000	5.5	ogoo)
	FUZE DELAY (sec)	9,9,9,9,9 11,1,9,9	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	999999 94499	<u>a</u> waaa iraiia	ળ ળ ળ ળ ળ ળ ળ ળ ળ ળ	2.2	
	CLOUD VISI- BILLTY (sec)	23.0 23.5 25.0 12.0	24.0 25.0 26.0 21.0	25.0 31.0 28.0 27.0	20.0 26.0 18.0	16.0 14.0 21.0 20.0	24.3	
8	HEIGHT OF BURST (ft)	००७ व०	40g0r	V መ ພ ተ ພ	001,00	00000	5.7	
	FUZE DELAY (sec)	ળળળળળ બંદેહેં ≒ં બં	94999 950000	ี เหน่งเล่ เหน่งเล่	0 0 0 0 0 6 0 0 4	ดดดดด ห่อผ่า	2.4	
	CLOUD VISI- BILLTY (sec)	្ ខដង្គង	8 7 3 7 3	48824	799 181 181	8a ๑๘ ๓	₹	
7	HEIGHT OF BURST (ft)	၀ရုဒ္ခ၀၀	4 d o r d	อดมีดน	≄ ⊢ n g o	00000	7.3	
	FUZE DELAY (sec)	0 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4		4 0 0 0 0 6 0 0 0 0	99199 10.799		2.1	
	CLOUD VISI- BILITY (Sec)	10.6 13.5 13.5 13.5	8.5 10.7 9.8 12.1	18.0 13.1 12.0	10.5 15.1 13.1 13.3	10.0 9.9 9.5 11.1	0.1	
9	HEIGHT OF BURST (ft)	<i>စ</i> က္∜ ဝရာ	45 08 15 6 13 80 6 13 80	wo o y o	စက္က မ ဝ		4.51	
	FUZE DELAY (sec)	4.0.0.0.0 6.1.0.0.0	8 9 9 9 9 9 8 9 9 1 6			લ લ લ લ લ લ મં મં લ લ લ	2.2	
	CLOUD VISI- BILLTY (sec)	16.1 1.6.1 1.3.1 1.5.1	10.8 15.3 17.1	18.0 17.5 13.1 16.8 15.8	16.1 13.5 16.1 14.8	18.5 Dud 17.1 18.0 17.1	15.4	
5	HEIGHT OF BURST (ft)	ထ သာ ပါ တ ပါ	มนุกฐน	ooooo	00000	o o o o o	8.1	
CTCLE	FUZE DELAY (sec)	44.044	4.00.00 4.00.00 5.00.00	0 0 0 0 0 0 0 1 4 4	9999999 64969	9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	Average: 2.2	

Detonation Data - Temperate

Table 8-B.

Table 9-A. Detonation Data - Tropic

		·					
	CLOUD VISI- BULLTY (sec)	8448 644 744 744 744 744 744 744 744 744 744	រូបម្រង្ ដំបំកក់	% % % % % % % % % % % % % % % % % % %	24.4 38.1 10.6 18.4	정 다 국 국 O 는 O	.9 27.6 (continued)
.#	HEIGHT OF HURST (ft)	o പ്പരപ്പം പ	0 0 A1 10 L	K00#	7 A B B C V	00000	6.4
	FUZE DELAY (sec)	പുപുന്നിൽ ദ	, o, o, o, o, i o' i i i i i			લલલ મહામાં મુદ્	2.4
	CLOUD VISI- BILITY (sec)	848483 666666	8.88.88 5.6.63.4.	83 83 83 84 85 85 85 85 85 85 85 85 85 85 85 85 85	35.3 33.4 35.0 59.6	29.4 31.8 37.5 37.4 31.4	36.4
3	HEIGHT OF BURST (ft)	00 N CO C	သဝထ လူ 🛪	t t t t o o	000##	***OOW	5.1
	FUZE DELAY (sec)	7.000 4.000 5.000		ณ์ พ.พ.พ.พ. พ.พ.พ.พ.พ.พ		999999 966446	2.3
	CLOUD VISI- BILITY (sec)	39.0 33.0 34.0 51.2	3.55 3.55 3.50 3.50	28.6 28.6 20.0 20.3 20.3	22.0 20.0 28.0 29.4 29.3	26.28 28.88 28.88 28.68 29.68	29.9
2	HEIGHT OF HURST (ft)	0 M 4 0 Q	ဝ္ဒကဝကဝ	ONFOD	0 4 4 v	ታመወጠቱ	p-7
	FUZE DELAY (sec)	ળળળળળ મળંદાં પાંતા		งงงงง หำหน้นนี้	ળળળળળ મંખળળળ		2.3
	CLOUD VISI- BILLITY (sec)	8.88 8.83 5.57 5.75	2.28844 6.446 6.446 6.466	21.0 25.3 28.4 17.5	22.6 21.6 24.5 24.5 25.8 25.8	28.44 4.8.6.9 30.0 0.0	23.0
-	HEIGHT OF BURST (ft)	၀၀၀၉၀	≠ ໘只∞只	omava	၀ ဆုထ ၛ ဝ	8 o 21 0 4	9.5
	FUZE DELAY (sec)		4 4 6 6 6 6 6 6	0 0 0 0 0 0	4.4.4.6.4.6.4.6.	, , , , , , , , , , , , , , , , , , ,	2:2
	CLOUD VISI- BILITY (sec)	5.58 5.38 5.88 5.88 5.88	88.55 13.64 23.64 23.64	88888 616117	. 25.4 37.3 38.6 28.1	33.22 38.8 38.8 36.8 36.8	29.9
	HEIGHT OF BURST (ft)	က္ခ်ီဝဝဝဝ	୦႙႙႙ၟ	∞ <i>⇒</i> ೪೩೩	0.40 N.0	യഷസഹഷ	6.6
CYCLE	FUZE FUZE DELAY (sec)	ี ผู้เก็บเก็บ เก็บเก็บ	ดดดด ผนจักจ	લ લ લ લ લ લં મું હું લં હું	ળ ળ ળ ળ ળ ળ ળ ળ ખં છે.	લ લ લ લ લ લ લ ન લ ન લ લ મ લ મ	Average: 2.3

Annex B(8)

(concluded)

CLOUD VISIT-BILLITY (Sec.) 22.03.0 22.03.0 22.0 23.0 18.9 19.4 16.1 88.5 88.5 83.4 11.5 446448 9.61 e de la company 0 Ħ PUZZE 40444 44466 2.3 CLOUD VISI-BILLITY (sec.) 26.25 27.5 20.6 30.6 30.6 8. 6. 6. 4. 6. 6. 6. 6. 4. 6. \$\\ \pi \\ \pi \ 43 88 88 16 16 68 BEICHE OF BURST (ft) ø w000 ဝစ္မေက ဝစ္စပ္မွစ္ေတတ္မွစ္ေတြ အမွာအဝ -PUZE ળ ળ ળ ળ ળ ૄ ન ળ બ ળ ળ ತ್ತ**ಹ** ಗ್ರತ 400000 44000 ស់សំឃុំឃុំឃុំ તાં ાં તાં તાં તાં CLOUD VISI-HILITY (sec) 39.0 38.5 47.0 40.7 23.4.27 33.2 38.7 38.7 39.3 39.3 34.23.8 2.1.0.08 33.7 22.1 33.6 33.1 ERICHE OF BURST (ft) 00404 nound forton runnu rondo 9 PUZE ชานุกรถ สานุกรถสา 40440 うせきすぐ ろようろう ċ તાં αi CLOUD WISI-BILLTY (sec) 88.0 88.0 83.0 83.1 4.42 22.1.4 20.09 10.00 10.00 23.0 છ 8 OF BURET (Ft.) 7.5 9 ontho opout pland drosd mpooo FUZE (sec) 40446 40000 ળળળળળ વંચવંચવં ળ ળ ળ ળ ળ માં હોમાં જે હો 4.5 CLOUD VISI-BILLTY (sec) 338858 330101 20.7 24.6 17.6 19.1 ф ထွ OF GET (Ft.) 7.8 **๛**പ്പാറ ച്യാരം ശരാവ് റാസ്പ് പ്പ്പാക Average: 2.4 CYCLE PUZE DELAY (sec) 0 0 0 0 0 0 0 4 0 0 4 ดดดดด กำนำกับเน่ 40466 ららる うき તાં તાં તાં તાં તાં

Tropic

1

Detonation Data

Table 9-B.



Figure 3. Typical air burst



Figure 4. Typical ground burst

Part IV - Recommended Distribution

Number of Copies

- Commanding General, U. S. Army Test and Evaluation Command, ATTN: Director of NBC Testing, Aberdeen Proving Ground, Maryland
- Commanding General, U. S. Army Edgewood Arsenal, ATTN:
 Director, Commodity Management, Edgewood Arsenal, Maryland
- Commanding General, U. S. Army Edgewood Arsenal, ATTN: Director, Engineering and Industrial Services, Edgewood Arsenal, Maryland
- Commanding Officer, U. S. Army Chemical Research and Development Laboratories, ATTN: Technical Library, Edgewood Arsenal, Maryland
- Commanding General, U. S. Army Edgewood Arsenal, ATTN: Director, Supply and Maintenance, Edgewood Arsenal, Maryland
- Commanding General, U. S. Army Edgewood Arsenal, ATTN: Director, Quality Assurance, Edgewood Arsenal, Maryland
- Commanding Officer, U. S. Army Biological Laboratories, ATTN: Chief, Biological Laboratories, Fort Detrick, Frederick, Maryland
- Commander, Armed Services Technical Information Agency, Arlington Hall Station, Arlington 12, Virginia
- President, U. S. Army Arctic Test Board, ATTN: STEBE-COP, APO 733, Seattle, Washington
- 1 Commanding Officer, Yuma Proving Ground, ATTN: STEYT-TMW, Yuma, Arizona
- 1 Commanding General, U. S. Army Edgewood Arsenal, ATTN: SMUEA-QA-OI, Edgewood Arsenal, Maryland
- Commanding Officer, U. S. Army Research and Development Office, Panama, ATTN: STERO-TEM, Drawer 942, Fort Clayton, Canal Zone

Number of Copies

Dugway Proving Ground:

1	Commanding Officer, ATTN: Scientific Director
1	Director, Technical Plans and Evaluation
2	Chief, Test Design and Analysis
5	Environmental Test Branch, TD&A
10	Chief, Technical Library

AD	UNCLASSIFIED	AD	HINCLASSTRIR
COM, Test Design a		COM, Test Design	THE STORES
Dugway Proving Ground, Utah	Surveillance Environmental	ving Ground,	Surveillance Environmental
REPORT OF SURVEILLANCE TEST (ENVIRONMENTAL)	Grenade	REPORT OF SURVEILLANCE TEST (ENVIRONMENTAL)	
(USATECOM PROJECT NO. 5-3-0510-01)	E21R1	(USATECOM PROJECT NO. 5-3-0510-01)	or eligine
Technical Report DPGR 377, December 1963 30 pp, 9 tables, 4 figures - UNCLASSIFIED	MQ	Technical Report DPGR 377, December 1963 30 pp, 9 tables, 4 figures - UNCLASSIFIED	DM
The grenade was subjected to environ- mental field testing for 47 to 49 months.	Abstract Card No	The grenade was subjected to environ- mental field testing for 47 to 49 months.	Abstract Card No
during this length of testing at Arctic, Desert, Temperate and Tropic Test Sites.	UNCLASSIFIED	during this length of testing at the Arctic, Desert, Temperate and Tropic Test Sites.	UNCLASSIFIED
ADACCESSION	UNCLASSIFIED	ADACCESSION	UNCLASSIFIED
USATECOM, Test Design and Analysis Division Dugway Proving Ground, Utah	Surveillance Environmental	USATECOM, Test Design and Analysis Division Dugway Proving Ground, Utah	Surveillance Environmental
REPORT OF SURVEILLANCE TEST (ENVIRONMENTAL) OF GRENADE, HAND, RIOT, DM, E21R1	Grenade	REPORT OF SURVEILLANCE TEST (ENVIRONMENTAL) OF GRENADE, HAND, RIOT, DM, E21R1	Grenade
(USATECOM PROJECT NO. 5-3-0510-01)	E21R1	(usatecom project no. 5-3-0510-01)	E21R1
Technical Report DPGR 377, December 1963 30 pp, 9 tables, 4 figures - UNCLASSIFIED	МО	Technical Report DPGR 377, December 1963 30 pp, 9 tables, 4 figures - UNCLASSIFIED	DM
The grenade was subjected to environ-mental field testing for 47 to 49 months.	Abstract Card No	The grenade was subjected to environ- mental field testing for 47 to 49 months.	Abstract Card No
ine grenade will iunction satisfactorily during this length of testing at the Arctic, Desert, Temperate and Tropic Test Sites	UNCLASSIFIED	The grenade will iunction satisfactorily during this length of testing at the Arctic, Desert, Temperate and Tropic Test Sites.	UNCLASSIFIED